


CHAIN TERMINAL


SFO series (Tab-on flag)

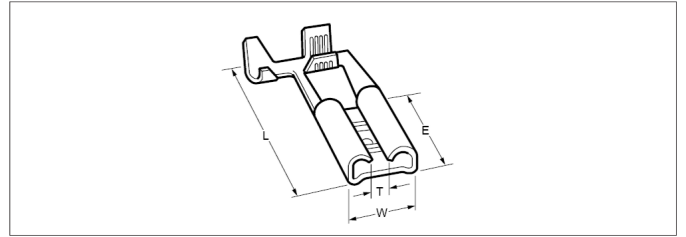

UL LISTED Listed file No. E70188 DIN 46346

Model No.	Standard	Applicable wire			Material	Finish	Dimensions(mm)						Q'ty / reel
		mm ²	AWG #	Insulation O.D. (mm)			W	L	E	T	Material thickness	Mating tab thickness	
SFO-1.0-250N	UL LISTED	0.5 to 1.0	20 to 18	2.0 to 3.3	Brass	—	7.6	14.1	7.6	2.3	0.4	0.8	3,000
SFO-1.0T-250N						Tin-plated							
SFO-2.5-250N	UL LISTED	1.0 to 2.5	18 to 14	2.7 to 4.3		—							
SFO-2.5T-250N						Tin-plated							


SPB series (Tab-on piggyback)

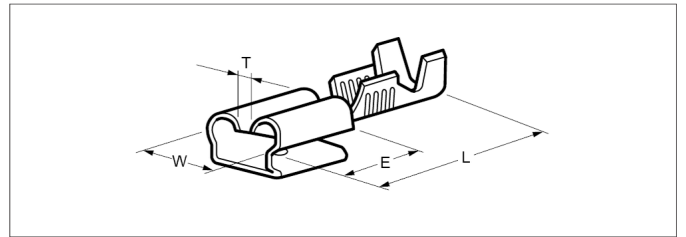

DIN 46345

Model No.	Standard	Applicable wire			Material	Finish	Dimensions(mm)						Q'ty / reel
		mm ²	AWG #	Insulation O.D. (mm)			W	L	E	T	Material thickness	Mating tab thickness	
SPB-1.0-250N-S		0.5 to 1.0	20 to 18	2.0 to 3.3	Brass	—	7.6	19.0	7.7	2.2	0.39	0.8	1,300
SPB-1.0T-250N-S						Tin-plated							
SPB-2.5-250N-S		1.0 to 2.5	18 to 14	2.7 to 4.3	Brass	—							
SPB-2.5T-250N-S						Tin-plated							

MPB series (Tab-on with two tabs)

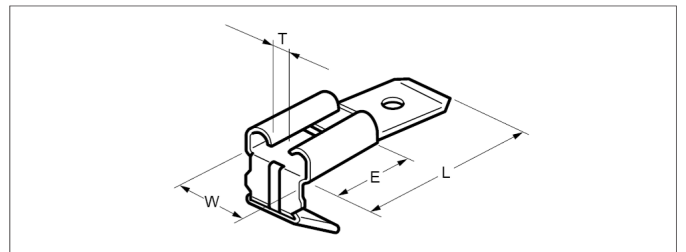

UL LISTED Listed file No. E70188 DIN 46347

Model No.	Standard	Material	Finish	Dimensions(mm)							Q'ty / reel
				W	L	E	T	Material thickness	Tab thickness	Mating tab thickness	
MPB-250	UL LISTED	Brass	—	7.6	18.3	7.5	2.4	0.39	0.8	0.8	10,000
MPB-T-250			Tin-plated								7,500